


TA

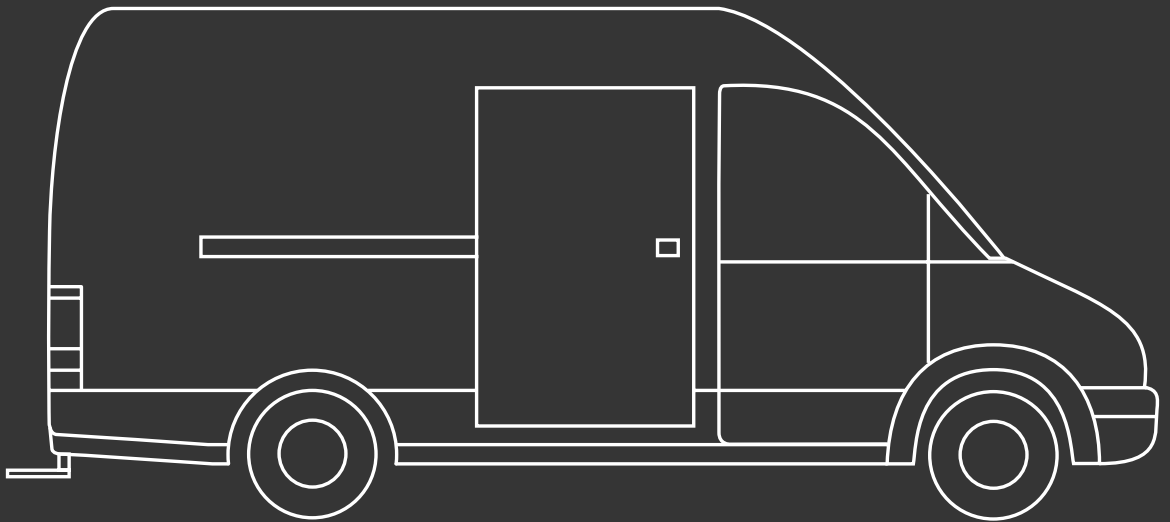

PANEL VAN SHELF CONVERSION UP TO 3.5 T


IVECO DAILY

SOMMER[®]

EINFACH **SICHER** TRANSPORTIEREN.

TECHNICAL DATA

Chassis: IVECO Daily Super High
 Wheel base: 3300 mm, 3950 mm
 Perm. total weight: 3500 kg

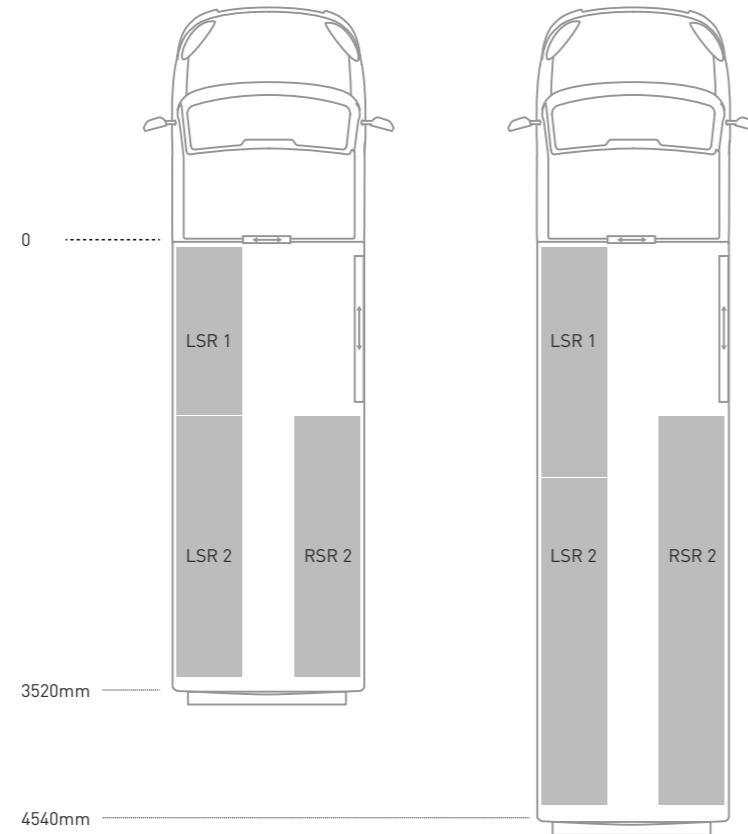

Version	IVECO Daily Super High	
Perm. total weight of vehicle	3,5 t	3,5 t
Wheel base	3300 mm	3950 mm
Max. payload including shelf conversion	1000-1250 kg	1000-1250 kg
Sliding door on driver's cab		
Clearance height	1800 mm	1800 mm
Passage width	500 mm	500 mm
Loading area/shelves		
Usable internal length of the loading area	3520 mm	4540 mm
Usable internal height of the loading area	1900 mm	1900 mm
Usable internal width of the loading area	1750 mm	1750 mm
Total volume of the loading area	12,00 m ³	15,60 m ³
Shelf length LSR 1	1250 mm	1800 mm
Shelf length LSR 2	1800 mm	2400 mm
Shelf length RSR	1800 mm	2800 mm
Depth of the lower shelf	550 mm	550 mm
Depth of the top shelf floor	520 mm	520 mm
Width of central gangway	600 mm	600 mm
Rear access step		
Height from ground to the rear access step	365 mm	365 mm

STANDARD SCOPE OF DELIVERY



Thanks to its optimum utilization of space, the SOMMER TA panel van shelf conversion provides generous storage possibilities not only in the shelves themselves but also for bulk items. A robust design with a 200 kg loading capacity per shelf and a stable partition wall along with a lockable sliding door are a matter of course with SOMMER.

In addition, you receive the payload-optimized SOMMER TA with practical top-quality equipment as standard: LED interior lighting, integrated Airline lashing rails for securing loads and much more.

See for yourself:




Driver's cab

- 1.90 m standing height due to special roof height.
- Foldable passenger seat.
- Checkered plate in entrance/exit area.



Partition wall

- Partition wall is made of anodised hollow profiles featuring a riveted construction method.
- Sliding door comprised of high-strength, noise-absorbant sandwich panel with a clear through-passage width of approx. 500 mm, clear through-passage height approx. 1,800 mm.
- Partition wall and door in compliance with DIN 75410.



Floor

- Multi-layered panel flooring made of birch with a rough surface.



Shelves

- 4 rows of shelving on the driver's side, 2 rows of shelving on the passenger side, all shelves individually foldable, made of extruded aluminium profiles.
- Shelf width approx. 520 mm - 550 mm.



Load-securing

- Airline lashing rails on the shelves themselves as well as on the loading area floor. Rails correspond to DIN75410 and VDI 2700, Sheet 15.
- Shelves complete with integrated safety edge.
- 6 lashing rings embedded in the floor.



Electrics

- LED loading area interior lights, mounted in the roof along the gangway, activated through movement sensors.


SPECIAL EQUIPMENT



- Nets installed between the shelving for load-securing.
- Non-slip mats fixed to shelves.
- Locking system with automatic closing mechanism for the partition wall sliding door, laterally-positioned sliding door and rear door. Unlocking via the vehicle's central locking system.



- Rear access step with non-slip tread.
- Reversing camera with monitor.

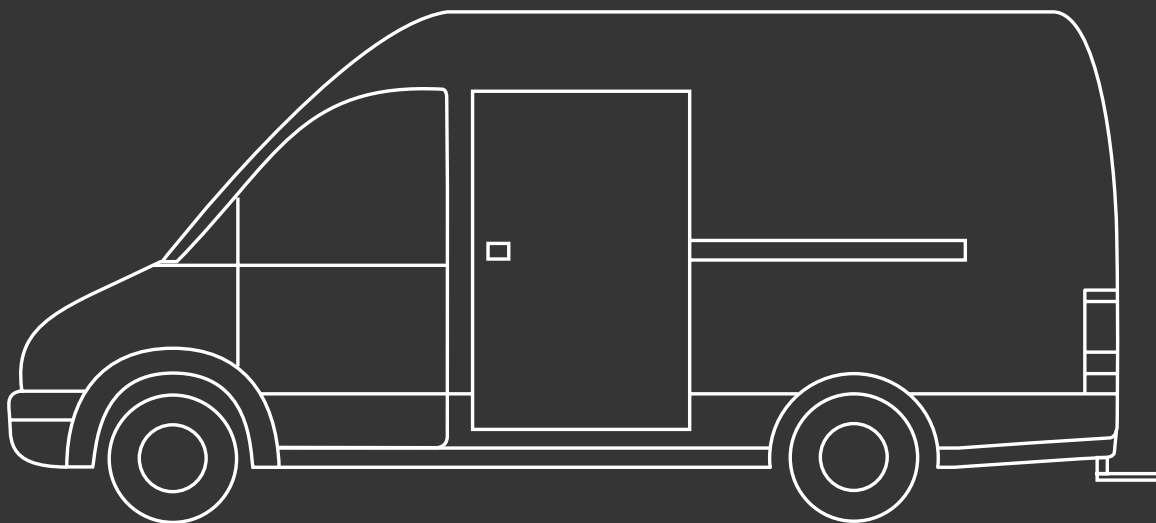

SOMMER®

SOMMER GMBH

Kleine Ziegelohstraße 8
D-06636 Laucha/Germany

Phone +49 (0)34462 580-0

Fax +49 (0)34462 580-71

info@sommer-online.de

www.sommer-online.de

Stand 09/2013. We reserve the right to alter the design and equipment; errors excepted. All specifications without guarantee. Vehicles featured in the images may be equipped with special equipment. Any decoration shown is not included in the scope of delivery.